

DECLARATION OF PERFORMANCE
No. 466.00


1. Name and code of the product:

Product: MAXRITE-R

Batch: See packaging

2. Name and contact address of the manufacturer or importer or distributor:

Name: DRIZORO, SAU

Contact address: C/Primavera 50-52. P. Ind. Las Monjas. 28850-Torrejón de Ardoz. (Madrid, Spain)

3. Intended use:

MORTAR FOR STRUCTURAL REPAIR OF CONCRETE IN BUILDING AND CIVIL ENGINEERING WORKS.

4. System of assessment and verification of constancy of performance: System 2+

5. Notified body:

Name and identification number: AENOR, 0099

Notified task: Assessment of the Factory Production Control

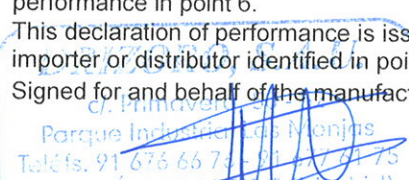
System of assessment: System 2+

Certificate of the Factory Production Control: 0099/CPR/B15/0011

6. Declared performance

Essential Characteristics	Performance	Harmonised Technical Specification
COMPRESSIVE STRENGTH	Class R3	EN 1504-3:2005
CHLORIDE ION CONTENT	$\leq 0,05 \%$	EN 1504-3:2005
ADHESIVE BOND	$\geq 1,5 \text{ MPa}$	EN 1504-3:2005
CARBONATION RESISTANCE	Pass	EN 1504-3:2005
ELASTIC MODULUS	$\geq 15 \text{ GPa}$	EN 1504-3:2005
THERMAL COMPATIBILITY PART 1: FREEZE-THAW	$\geq 1,5 \text{ MPa}$	EN 1504-3:2005
THERMAL COMPATIBILITY PART 2: THUNDER SHOWER	$\geq 1,5 \text{ MPa}$	EN 1504-3:2005
THERMAL COMPATIBILITY PART 3: DRY CYCLING	$\geq 1,5 \text{ MPa}$	EN 1504-3:2005
CAPILLARY ABSORPTION	$\leq 0,5 \text{ kg.m}^{-2}.\text{h}^{0.5}$	EN 1504-3:2005
REACTION TO FIRE	A1	EN 1504-3:2005
DANGEROUS SUBSTANCES	Comply 5.4	EN 1504-3:2005

- The performance of the product identified in point 1 is in conformity with the declared performance in point 6.
- This declaration of performance is issued under the sole responsibility of the manufacturer, importer or distributor identified in point 2.
- Signed for and behalf of the manufacturer, or importer or distributor by:


 Mr. Francisco Rodríguez Álvarez.

Director of Quality and Environment.

 Torrejón de Ardoz, 20th December, 2016